



8ft Single Pin T8 Led Tube Light

Features:

- UL 1598C & DLC Standard With internal driver
- Long Life span, up to 50,000 hours, 5 years warranty
- High power factor ≥ 0.95 , THD $< 15\%$
- Light source: LM80 Passed SMD 2835 High Efficiency
- High efficiency: 115-130 Lm/W
- High CRI: Ra >80
- Energy saving up to 80% than traditional fluorescent lamp
- Aluminum base for good heat dissipation
- Compatible with or without ballast, easy installation without doing wire change or ballast remove
- Viewing Angle: 120 degree
- Warranty: 5 Years



Application:

- Replacement for conventional panel lights :
- Hotels / Meeting Rooms
- Factories / Offices / Car parks / Schools
- Hospitals / Supermarkets / Railway Stations & Airports

8ft Single Pin T8 Led Tube Light




Technical Parameters:

Input Voltage	AC100V~277V
Frequency Range	50Hz/60Hz
Total Harmonic Distortion	≤ 15 %
LED Type	SMD 2835
CRI	Ra >80
Power Factor	>0.95
Beam Angle	120°
Working Temperature	-20℃ - 45℃
Storage Temperature	-25℃ - 65℃
IP Grade	IP20
Certificate	FCC/UL/CUL/DLC
Material	Plastic cover: Milky/Clear
	Base: Aluminum base


8ft Single Pin T8 Led Tube Light

Model	Power consumption	Luminous flux	LED Q'ty	Length	Cover	Efficiency
JP-BDT88FUA-36WB-XWMF	36W	3900±5%	288 PCS	2400mm	Milky/Clear	110-120 Lm/W

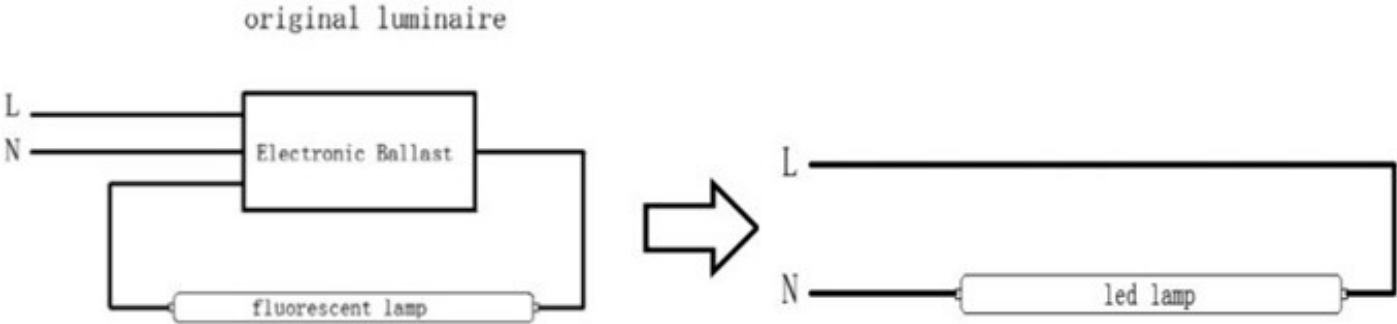

8ft Single Pin T8 Led Tube Light

Package:

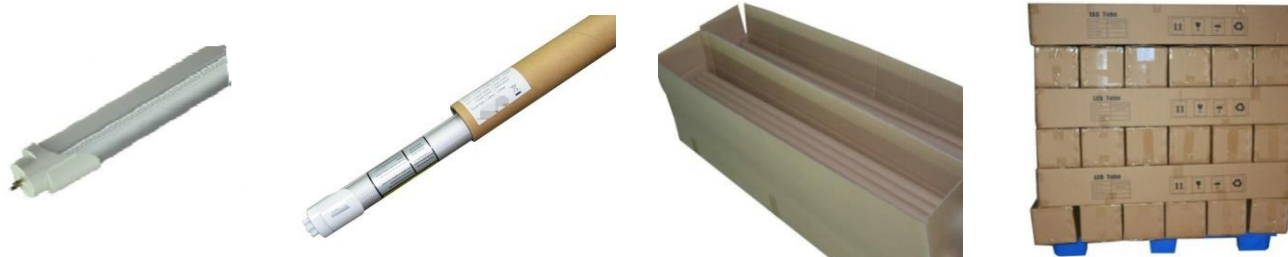

Product	Package dimension	N.W.	G.W.	Qty/CTN
T8-600mm	65X22X22cm	0.25kg/PCS	7.5kg/CTN	25pcs/carton
T8-1200mm	125X22X22cm	0.47kg/PCS	12.8kg/CTN	25pcs/carton
T8-1500mm	155X22X22cm	0.57kg/PCS	16.5kg/CTN	25pcs/carton
T8-2400mm	245X22X18cm	0.94kg/PCS	23.4kg/CTN	20pcs/carton

Warranty:

- 5 years warranty from the shipping date;
- We will replace all the failed products due to design/production quality during warranty period;
- We will bear all cost of maintains if the customer can help us to repair locally;
- We don't have the responsibility to compensate for any incorrect installation or artificial damage;
- We don't have the responsibility to compensate for damage occurred during the transit;

Warning:

- Please use the product within the specified range of voltage;
- Please follow the correct installation steps to install the product, and do not touch when it is working;
- Please turn power off when installing and removing the products to avoid risk of electric shock;
- Please install the tube in the correct sized fixture;
- Do not look directly at LED light source for a long time;

JOYTECH PRODUCTS CO.,LTD

1F, No.15, Lane 27, Sec.3 Chung-king South Rd., Taipei 100,Taiwan, R.O.C

Tel : 886-2-23582899 Fax : 886-2-23415778

E-Mail : sales@joytech-jpc.com.tw Website : www.joytech-jpc.com.tw